


SANYO

Cadnica

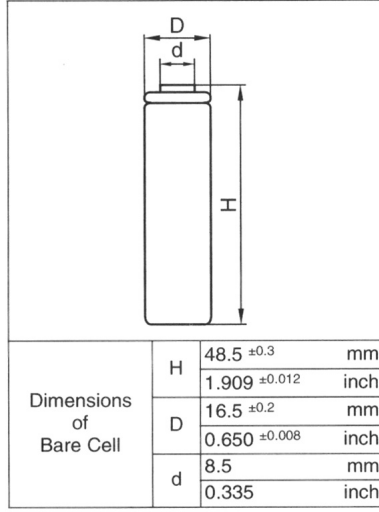


Cell Type KR-1700AU

Specifications


Nominal Capacity		1700mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	170mA	
	Fast	2600mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0 to 45 °C [32 to 113 °F]
		Fast	0 to 45 °C [32 to 113 °F]
	Discharge		-20 to 60 °C [-4 to 140 °F]
	Storage		-30 to 50 °C [-22 to 122 °F]
Internal Impedance(Av.) (at 50% discharge)		17mOhms (at 1000Hz)	
Weight		36g/1.27oz	
Dimensions(D)x(H) (with tube)		17.0 ⁰ _{-0.7} x 50 ⁰ _{-1.5} mm 0.67 ⁰ _{-0.03} x 1.97 ⁰ _{-0.06} inch	

Typical Characteristics


Charge

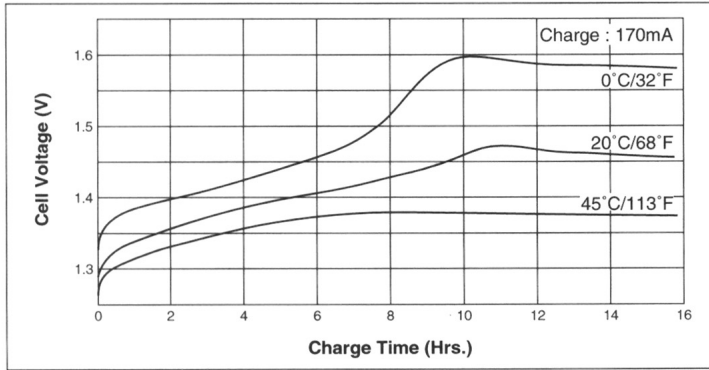


Discharge (at high rate)

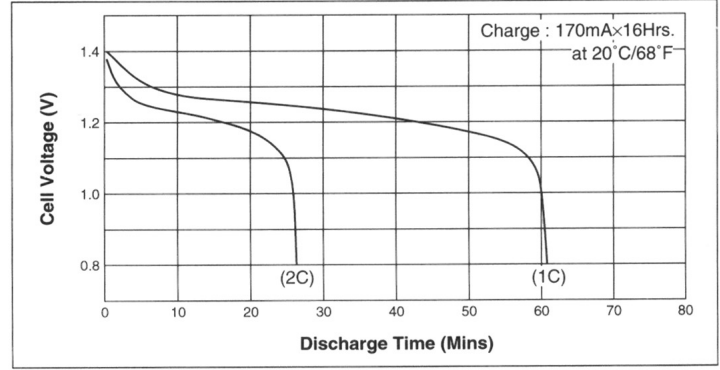


Charge

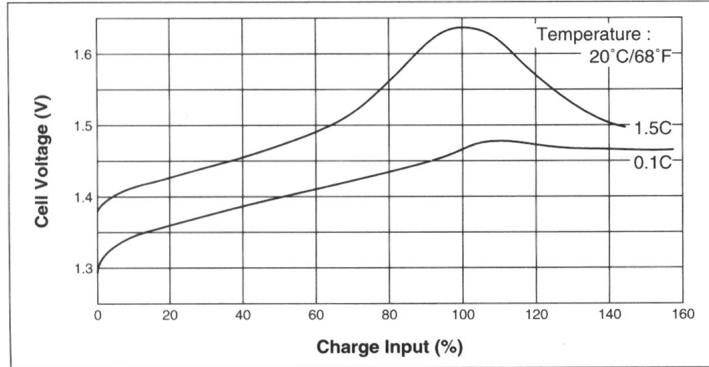

Discharge (at high rate)

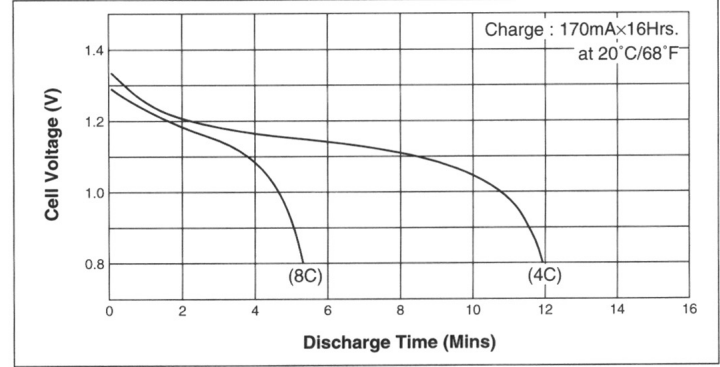

Discharge (at low rate)

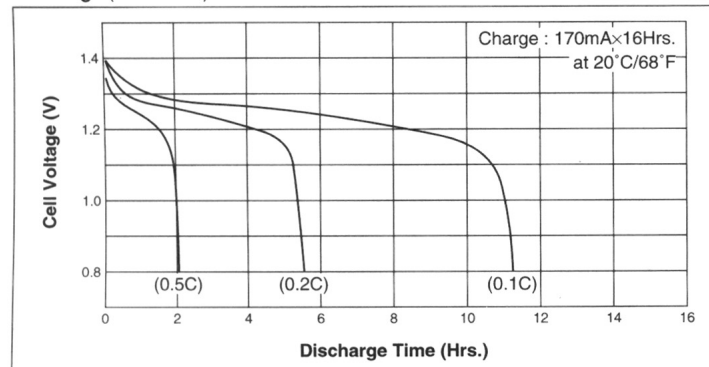

Temperature (Charge & Discharge)

